



#5
08/701739

ATTORNEY DOCKET NO.: 52,036

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : PERERA
Serial No :
Filed :
For : ELECTRICAL CONNECTOR
Art Unit :
Examiner :
Dated : August 22, 1996

Hon. Commissioner of Patents
and Trademarks
Washington, D.C. 20231

PRIORITY DOCUMENT

In connection with the above-identified patent application, Applicant herewith submits a certified copy of the corresponding basic application filed in


Australia

Number: PN 4994/95


Filed: 23/Aug./1995

the right of priority of which is claimed.

Respectfully submitted
for Applicant(s),

By: 
REG# 34575 for
John James McGlew
Reg. No.: 31,903
McGLEW AND TUTTLE

and,

By: 
Theobald Dengler
Reg. No.: 34,575
McGLEW AND TUTTLE

JJM/TD:tm

Enclosure: - Priority Document
52036.3

DATED: August 22, 1996
SCARBOROUGH STATION
SCARBOROUGH, NEW YORK 10510-0827
(914) 941-5775

NOTE: IF THERE IS ANY FEE DUE AT THIS TIME, PLEASE CHARGE IT TO
OUR DEPOSIT ACCOUNT NO. 13-0410 AND ADVISE.

I HEREBY CERTIFY THAT THIS CORRESPONDENCE IS BEING DEPOSITED
WITH THE UNITED STATES POSTAL SERVICE AS EXPRESS MAIL,
REGISTRATION NO. EM467491863US IN AN ENVELOPE ADDRESSED TO:
COMMISSIONER OF PATENTS AND TRADEMARKS, WASHINGTON, D.C.
20231, ON August 22, 1996

McGLEW AND TUTTLE, SCARBOROUGH STATION,
SCARBOROUGH, NEW YORK 10510-0827

By: Barbara Gedrak

Date: August 22, 1996



95-010

**Patent Office
Canberra**

I, DAVID DANIEL CLARKE, ASSISTANT DIRECTOR PATENT SERVICES,
hereby certify that the annexed are true copies of the Provisional specification and
drawing(s) as filed on 23 August 1995 in connection with Application No. PN 4994
for a patent by KRONE AKTIENGESELLSCHAFT filed on 23 August 1995.

I further certify that the annexed documents are not, as yet, open to public inspection.

WITNESS my hand this Seventeenth
day of July 1996

A handwritten signature in cursive script, appearing to read "D Clarke".

DAVID DANIEL CLARKE
ASSISTANT DIRECTOR PATENT SERVICES



AUSTRALIAN	
PROVISIONAL No.	DATE OF FILING
PN4994	23 AUG. 95
PATENT OFFICE	

Krone Aktiengesellschaft

A U S T R A L I A

Patents Act 1990

PROVISIONAL SPECIFICATION

for the invention entitled:

"Electrical Connector"

The invention is described in the following statement:

ELECTRICAL CONNECTOR

This invention relates to an electrical connector for making electrical connection to an insulated electrical conductor.

5

In power distribution systems which utilise insulated cables it has traditionally been necessary to strip the insulation from an end of a cable in order to make electrical connection thereto. For example, it may be desired to terminate an insulated cable at an electrical connector for connection to a circuit breaker or the like. Traditionally, terminating power cables such as those used to carry heavy current or high voltage has not been difficult because such cables have been supported overhead by towers or poles and thus have not needed to be insulated. Recently, however, there has been an increase in the placement of power cables underground, for instance, thus requiring that the cables be insulated such as by way of an outer sheath of plastic material. This outer sheath can cause difficulties in terminating such cables because, in order to make good electrical contact with the conductor(s) of the cable it has previously been necessary to have access to at least some axial length of the conductors at the cable end. This requires that a length of insulation be removed from the cable to facilitate making electrical connection to the conductor(s) underneath. Stripping the insulation layer can be an arduous and time consuming task for power cables, which may be several millimetres to centimetres in diameter with an insulative layer which is a few millimetres thick.

GB 1198787 describes an electrical connector for making electrical connection to an electrical conductor sheathed by an insulative covering, comprising:

25 a conductor receptacle having a recess therein for receiving an insulated portion of an electrical conductor; and

electrical contact means supported by the receptacle and moveable transversely thereto the conductor when received in the recess, the contact means having an end portion adapted to displace or pierce an insulative covering of said portion of the insulated conductor and make electrical connection to said conductor upon such transverse movement.

In the construction of GB 1198787, the contact means is a rotatable screw component threadedly received in the conductor receptacle. The recess for receiving the electrical conductor is provided with a conical recess opposite the location where the contact means is provided so that when the contact means is advanced to pierce the insulative covering of the conductor, part of the cable is pressed into the conical recess to facilitate holding. This arrangement is however not suitable for heavier cables where considerable force would be required to effect the necessary deformation of the cable into the recess. The cable may be engaged by opposed movable contact means, an opposed fixed protuberance or the like, such as described in UK 1172119, DE 1259993, FR 10 2021510, US 3816817 and DE 1928341.

In GB 1239738, the cable is engaged at one side by electrical contact means which penetrates the cable sheath, and at an opposed side of the sheath, wedges are provided on another part of the connector to make contact with the conductors of the cable. The wedges are formed of insulative material or are otherwise insulated so as not to provide a current conducting path. In CH 552896, there are transverse parts opposite the contact member, these being mounted on a movable element. Generally, it has been found that the provision of such transverse engaging parts opposite the contact member facilitates holding but, particularly with heavy cables, adequate holding or electrical coupling may still not be achieved with these constructions, particularly in view of the provision of the transverse engaging parts as separate elements, which, whether due to insulative isolation or increased contact resistance, do not provide fully effective operation, or effective resistance to relaxation of cable holding pressure over time.

25 In one aspect, the invention provides an electrical connector for making electrical connection to an electrical conductor sheathed by an insulative covering, comprising:

a conductor receptacle having a recess therein for receiving an insulated portion of an electrical conductor; and

30 electrical contact means supported by the receptacle and moveable transversely thereto the conductor when received in the recess, the contact means having an end portion adapted to displace or pierce an insulative covering of said portion of the insulated conductor and make electrical connection to said conductor upon such

transverse movement, said recess having knife edged protrusions to facilitate the insulation piercing and electrical connection on a side of the electrical conductor opposite to the contact means, said conductor receptacle being electrically conductive and said knife edged protrusions being formed integrally with the receptacle, the electrical contact
5 means being electrically connected to the receptacle.

In one form of the invention, the conductor receptacle comprises a housing having a generally cylindrical or contoured hole or passage therein which constitutes said recess. The electrical contact means can then extend through a wall of the housing from the
10 outside thereof such that the end portion, in use, protrudes into the recess. In this way, the insulated conductor portion can be inserted in the recess and the contact means adjusted to protrude into the recess to thereby displace or pierce the insulation adjacent thereto, make electrical connection to the underlying electrical conductor, and at the same time clamp the insulated conductor portion in the recess. Advantageously, the recess is
15 dimensioned in cross-section to allow an insulated conductor portion to be inserted therein with only a small clearance between the exterior of the insulative layer and the interior surface of the recess itself.

In one form of the invention, the contact means is provided with an external screw
20 thread for engaging an internally threaded passage in the conductor receptacle, wherein rotation of the contact means effects relative movement as between the contact means and receptacle so as to cause the contact means end portion to protrude into the recess to make said electrical connection with an insulated conductor when inserted therein. Alternatively, the contact means may undergo movement relative to the receptacle under
25 action of any convenient driving means and held in its electrically connecting orientation by way of a spring bias or the elasticity of the device as a whole. In another form of the invention the screw threaded contact means engages a spring loaded block which is spring biased towards the recess to help maintain electrical contact subsequent to insulation piercing.

30

In another form of the invention, the relative movement between the threaded contact means and the receptacle is effective to displace, cut and pierce the insulation,

both at the end portion of the contact means and the knife edged protrusions provided in the recess of the contact receptacle.

5 The end portion of the contact means may be provided with an insulation cutting surface to aid the end portion in piercing or displacing the insulative layer. For example, the contact means can be in the form of a screw threaded bolt or the like, having a generally rounded end with a radially and axially extending cutting edge.

10 Additionally, to aid in making and keeping electrical connection between the contact means and electrical conductor, a jointing compound can be provided on the end portion of the contact means. For example, the contact means end portion can be constructed with one or more cavities which are filled with jointing compound before electrical connection is made to an electrical conductor. A cavity filled with jointing compound can also be provided where the contact means engages the conductor
15 receptacle to enable a reliable electrical contact to be maintained therebetween. The outer edge of this cavity serves also as a cutting edge in the insulation cutting, piercing and displacing process in addition to the other radially and axially extending cutting edges which may be provided on the contact means.

20 Where only a single conductor is contained in an insulated electrical cable to which connection is to be made, a single contact means can be utilised or, alternatively, multiple contact means can be provided in a single conductor receptacle, displaced angularly and/or axially about the recess to make multiple electrical connections to the conductor. In some cases, a plurality of separate conductors are arranged within a single
25 insulated cable, for example disposed at different angular orientations with respect to the cable axis. In this case, the electrical connector of the present invention can be used to make connection to a plurality of said conductors separately by providing a plurality of angularly displaced contact means disposed about the recess at substantially the same angular spacing as the conductors within the cable.

30

It will be appreciated that various combinations of high axial force by the contact means on the insulated conductor, radially and axially extending cutting edges on the

contact means end portion, the outer edge of cavities formed in the end portion, and preformed knife-edged protrusions in the recess transverse to the axis of the cable, can be utilised in accordance with the invention to facilitate the making of electrical contact to the cable through the insulative sheath thereof. It has however been found,
5 surprisingly that cutting edges are not necessary, if the end portion is formed of a domed configuration.

Thus, in another aspect, the invention provides an electrical connector for making electrical connection to an electrical conductor sheathed by an insulative covering,
10 comprising:

a conductor receptacle having a recess therein for receiving an insulated portion of an electrical conductor; and

electrical contact means supported by the receptacle and moveable transversely thereto the conductor when received in the recess, the contact means having an end
15 portion adapted to displace or pierce an insulative covering of said portion of the insulated conductor and make electrical connection to said conductor upon such transverse movement, said end portion or said electrical contact means being of domed form substantially free of cutting edges.

20 The invention also provides a method for making electrical connection to an insulated electrical conductor, comprising the steps of providing an electrically conductive receptacle having a recess for receiving an insulated portion of an electrical conductor, said recess having transversely extending knife-edged protrusions formed integrally, providing a contact means which is electrically coupled to the conductor receptacle and
25 moveable relative to the receptacle to enable an end portion thereof to protrude into said recess at a side opposite said protrusions, inserting an insulated portion of an electrical conductor in said recess, and displacing the contact means with respect to the receptacle so as to penetrate an insulative layer of the insulated conductor portion and make electrical contact with the electrical conductor underneath, and to cause said knife-edged
30 projections to also pierce the insulative layer to make contact with the electrical conductor.

The invention still further provides a method making a conductor receptacle for an electrical connector for making electrical connection to an electrical conductor sheathed by an insulative covering, the electrical connector comprising:

5 said conductor receptacle having a recess therein for receiving an insulated portion of an electrical conductor; and

 electrical contact means supported by the receptacle and moveable transversely thereto the conductor when received in the recess, the contact means having an end portion adapted to displace or pierce an insulative covering of said portion of the insulated conductor and make electrical connection to said conductor upon such
10 transverse movement, said recess having knife edged protrusions to facilitate the insulation piercing on a side of the electrical conductor opposite to the contact means,

 said method including forming said recess by use of a cutting tool having a forward portion provided with end and side cutting teeth and a following portion formed with teeth of profile complementary to the form of the protrusions, comprising advancing
15 the tool into a block of material which is to form the conductor receptacle so that the teeth on the forward portion cut a circular recess, and then moving the tool sidewardly within the circular recess to sidewardly elongate the circular recess and cause the teeth on the following portion to form said protrusions as part-circular ridges.

20 The invention is described in greater detail hereinafter, by way of example only, with reference to the accompanying drawings, wherein:

 Figure 1 illustrates a conventional means for making electrical connection to an insulated cable;
25

 Figure 2 is a cross-sectional view of an electrical connector in accordance with one form of the invention;

 Figure 3 is a close-up view of an end portion of an electrical contact means for
30 the invention;

Figure 4 is a part cross-sectional view of an electrical connector in accordance with another form of the invention;

Figure 5 is a cross-sectional view of an electrical connector in accordance with
5 another form of an invention;

Figure 6 is a front view of another embodiment of the invention;

Figure 7 is a cross-sectional view of the embodiment of Figure 6 taken on line
10 x-x in Figure 6;

Figures 8 and 9 are cross-sectional views illustrating steps in manufacture of the embodiment of Figure 6;

Figure 10 is a side view of a tool used in forming the embodiment of Figure 6;
15 and

Figure 11 is a fragmentary view of an alternative form of contact member useful in electrical connectors constructed in accordance with the invention.
20

Figure 1 illustrates a conventional way of making electrical connection to an insulated cable 4 which comprises a core 6 consisting of an electrical conductor which may be formed from a plurality of strands, which is sheathed by an insulative layer 8. The conventional electrical connector 2 comprises a connector body 10 which has a
25 cylindrical hole 12 therein for receiving the conductor core 6. In order to make an electrical connection between the conductor 6 of the cable 4 and the electrical connector 2, it is first necessary to remove a portion of the insulative sheath 8 from the end of the cable. Removing the insulative sheath 8 exposes a portion of the conductor core 6, which portion is then inserted into the cylindrical hole 12 formed in the connector body 10. The
30 cylindrical hole 12 is dimensioned in cross section so as to fit with the conductor core 6 when inserted therein. Additionally, the cylindrical hole 12 is provided with an electrically conductive lining which covers at least a portion of the interior surface of the

hole. Thus, when the conductor core 6 is fitted into the cylindrical hole 12, with a tight fit occurring between the outer conductive surface of the core 6 and the inner surface of hole 12 containing an electrically conductive lining, an electrical connection is formed between the conductive lining of the hole and the conductor core 6 of the electrical cable

5 4. In order to hold the end portion of the cable to the electrical connector 2, a clamping bolt or screw 14 is provided which passes through a wall of the connector body 10 such that an end thereof can engage the conductor core 6 when inserted in cylindrical hole 12. By rotating the clamping bolt 14 so as to engage the conductor core 6, the end portion of the cable 4 is clamped within the cylindrical hole 12, which both physically holds the

10 cable 4 and connector 2 against separation and presses the conductor core 6 into better electrical contact with the conductive lining in the cylindrical hole 12 of the electrical connector.

Bearing in mind that in the case of a high current or high voltage power conductor

15 the cable 4 may be several millimetres to centimetres in diameter with an insulative layer of a few millimetres in thickness, the removal of a portion of the insulative layer can be a time consuming and arduous task, requiring a hand cutting tool, for example. The embodiments of the present invention which are described in detail hereinbelow provide the advantage that removal of the insulative layer from an insulated electrical cable is not

20 necessary in order to make electrical connection to the conductor or conductors within the cable. Additionally, an advantage in physical connection can be achieved between the cable and connector by physically engaging both the conductor core itself as well as the insulative sheath of the cable.

25 Referring now to Figure 2, there is shown a cross-sectional view of an electrical connector 20 constructed in accordance with one form of the invention. The connector shown in Figure 2 is adapted to make connection to two insulated electrical cables. The electrical connector 20 comprises a receptacle in the form of a connector block 22 having two cylindrical recesses 26 therein, shown in cross-section, for receiving electrical cables.

30 A plurality of passages 27 are also provided in the connector block 22, extending between the exterior of the block 22 and respective recesses 26. The direction of extent of the passages 27 are transverse and generally orthogonal to that of the recesses 26. The

passages 27 are formed with an internal screw thread 38. The internal screw thread 38 of the passages 27 allows a contact member 24, in the form of a bolt-like member with a complimentary external screw thread 39, to be received in a passage 27 with threaded engagement with the connector block 22. Each contact member 24 is constructed with
5 an end portion 34 with, in this instance, a rounded profile. By screwing the contact member 24 into the passage 27, the end portion 34 thereof can be made to protrude into the corresponding recess 26. Each recess 26 is dimensioned in cross-section to receive an insulated electrical cable 28 which comprises a conductor core formed from strands 30, sheathed by an outer insulative layer 32. To make electrical connection to such a
10 cable, a section of the cable is inserted in a recess 26 to an extent where a portion of the cable lies adjacent the intersection of the recess 26 and a passage 27. A contact member 24 inserted in the passage 27 is advanced toward the recess 26 by a screwing action, until the end portion 34 of the contact member abuts the outer surface of the insulative layer 32 of the cable. The contact member 24 is then advanced further toward the axis of the
15 cable 28 held in passage 26, such that the end portion 34 of the contact member presses into the insulating sheath and eventually penetrates the insulative layer to make contact with the conductor strands 30 at the core of the cable 28, thus establishing an electrical connection between the conductor strands 30 and end portion 34 of the contact member 24. The penetration of the insulating sheath by the contact member involves some
20 deformation of the cable portion, and may also involve deformation of the connector block 22 to a small extent. This deformation is at least partially elastic in nature, which aids in clamping the cable portion within the recess 26 of the electrical connector. Furthermore, since the end portion 34 of the contact member is held in a position where it pierces the insulating sheath 32, the sheath itself is also anchored to the electrical
25 connector 20 as well as the conductors themselves.

The cable shown in the upper recess 26 in Figure 2 is in electrical contact with two contact members 24, which can be seen penetrating the insulative sheath 32 from the left and right sides in the drawing. The conductor strands 30 of the cable are compressed
30 by the contact members in the recess and make electrical contact with the surface of the end portions 34 of the contact members. The cable in the lower recess in Figure 2 is

shown before an electrical connection is made thereto, where the respective contact members 24 have not yet been advanced in passages 27 to protrude into the recess 26.

5 Once an electrical connection between the contact member 24 and conductors 30 of the cable 28 has been established, an external electrical connection can be made to the contact member 24. One way in which the external connection can be achieved is to construct the internal screw thread structure 38 of the passage 27 from a conductive material, whereby an electrical connection is established between the contact member 24 and the conductive thread structure 38 by contact between the complimentary internal and
10 external threads 38,39. This conductive thread structure may in turn be connected to, for example, a circuit breaker terminal or the like, which may be incorporated into the same structure as the connector block 22.

15 In order to aid the end portion 34 of the contact member in piercing the insulation sheath of an electrical cable, the end portion can be provided with one or more cutting edges or profiles. An end portion 34 of a contact member 24 is illustrated in close-up in Figure 3, which shows where the rounded end portion has a spiral section 44 removed so as to form a cutting edge 46. It is envisaged that many different types of cutting edges formed on the end portion 34 would be suitable in aiding in the penetration of the
20 contact member 24 through the insulation layer 32.

Referring again to Figure 2, the contact member 24 shown in the lower left hand quadrant of the electrical connector is provided with an axially extending cavity 36 which opens to the end surface of end portion 34. This is shown in greater detail on the contact
25 member in Figure 3. In practice, it has been found advantageous to provide abutting surfaces which make electrical contact with a cable jointing compound, which facilitates the cleaning of the electrical contact area, repels moisture and inhibits corrosion build up to maintain a good electrical contact between the abutting surfaces. Thus, a cavity 36 can be provided in the contact member 24, which is open to the end portion 34 and filled
30 with a jointing compound before use. Additional cavities filled with jointing compound can also be provided opening to the internal screw thread surface 38 to facilitate better electrical connection between the screw thread surfaces of the connector block 22 and

contact member 24. The edge of the cavity 36 on the surface 34, serves also as a cutting edge in displacing and piercing the insulation sheath 32. This cavity edge enables a considerable reduction in the piercing force required of the contact member on the cable exterior.

5

As can be seen from the electrical connector arrangement in Figure 2, where two passages 27 are provided for each recess 26, multiple contact members 24 can be utilised to make electrical connection to the same conductors 30 of a single conductor cable 28. Figure 4 shows an alternative electrical connector arrangement 50, wherein a portion of
10 a connector block 52 and multi-conductor cable 56 are shown in cross-section. In some electrical current carrying cables, a plurality of separate conductors are provided within the same insulative sheath. For example, an electrical cable adapted to carry three phase power may have four separate conductors within the same cable, one for each phase and one neutral conductor. In this case, the separate conductors may be arranged within the
15 insulative sheath angularly displaced from one another about the cable axis. Figure 4 illustrates a cable 56 of this type, comprising a plurality of conductors 62a, 62b, 62c and 62d disposed within an insulating sheath 60. As mentioned, only a portion of the electrical connector 50 is shown, which might ordinarily extend completely around the circumference of the cable 56, in the manner of the connector 20 shown in Figure 2. The
20 portion 52 of the connector is shown with the cable 56 located in the recess 54 of the electrical connector, such that a conductor 62a of the cable is aligned with a passage 68 formed through the connector block 52. The opening of the passage 68 to the recess 54 is broadened at 78 to accommodate a spring biasing means comprising a block 76 having an internally screw threaded hole therethrough and a spring device 80. The spring device
25 80 is positioned between a flanged surface of the widened passage 78 and the block 76, and acts to press the block 76 toward the surface of cable 56 when positioned in the recess 54. A contact member 64 has an external head portion 72 to enable rotation of the contact member, a shaft 70 which passes through the passage 68 formed in the connector body 52, a threaded shaft portion 74 which engages the threaded hole formed
30 in block 76, and an end portion 66 which can be made to protrude into the recess 54, as described hereinabove. The operation of the electrical connector 50 illustrated in Figure 4 is generally the same as the electrical connector 20 shown in Figure 2, except that a

spring bias is provided to the contact member 64 by the spring device 80 acting on the block 76 to which the contact member 64 is threadedly engaged. This spring bias acts to press the end portion 66 of the contact member toward the conductor 62 so as to ensure the maintenance of a reliable, stable and good electrical connection therewith.

5

Furthermore, although Figure 4 illustrates only connection to a single conductor 62 of the plurality of conductors in cable 56, it is possible to provide the electrical connector 50 with a plurality of contact members 64 angularly displaced from one another at angles corresponding to the locations of the respective conductors in the cable.

10 In this way, it is possible to provide an electrical connector 50 which can make connection to each of the conductors in a multi conductor cable, or any one or more of the conductors as desired. It must be borne in mind that the conductors in a multi-conductor cable may have additional insulative layers, such as individual insulation layers 61, which the contact member 64 must pierce in order to make electrical connection with
15 one of the conductors.

Figure 5 shows an alternative electrical connector 20 in longitudinal cross-sectional view. Like the connector shown in Figure 2, the connector block 22 has a recess 26 formed therein, into which contact members 24 can be made to protrude. In
20 this instance, however, the recess 26 is made larger in the cross-sectional dimension in which the contact members are moveable, and the recess surface opposite the contact members is provided with knife edged protrusions 90. The recess 26 is enlarged to allow the cable 28 to be inserted therein over the protrusions 90. When the contact members 24 are extended into the recess, the force of the contact members bearing on the cable
25 causes the insulation 32 to be pierced by the protrusions 90 as well as by the contact members themselves. The knife edged protrusions thus provide both increased electrical contact area with the conductors 30 of the cable, and also increased mechanical anchoring stability of the cable 28 within the connector 20.

30 The electrical connector 100 shown in Figures 6 and 7 functions in a similar fashion to those previously described. Connector 100 comprises an electrically conductive receptacle 122 in the form of a connector block having a somewhat cylindrical

recess 124 therein and extending inwardly from a front face 122a of the receptacle 122. In cross-section, the recess has two opposed semi-circular portions 124a, 124b interconnected by straight line portions 124c, 124d (Figure 6). This configuration results from the method of formation of the recess which is described later.

5

A screw threaded passage 127 is provided in the receptacle 122, extending inwardly from a side face 122b of the receptacle 122. An electrically conductive contact member 126 similar to the contact members previously described is screw threaded into the passage 127 so as to be capable of being advanced or retracted therein by rotation thereof. The axis of the passage 127 is normal to the lengthwise direction of extent of the recess 124, and aligned in a plane 128 (Figure 6) about which the cross-section of the recess is symmetrical. The passage 127 breaks into the recess 124 at a location centrally disposed with respect to the semi-circular portion 124a of the cross-section of the passage, also as shown in Figure 6. The contact member 126 is formed of electrically
10
15 conductive material and is thus coupled electrically to the receptacle 122.

The recess 124 has, as shown in Figure 7, an outer section 130 which is rather shallow and of somewhat increased cross-section as compared with an inner section 132 of the recess. The passage 127 breaks into the recess at section 132, approximately
20 midway along the length thereof. At the semi-circular portion 124b of the recess 124, at section 132 of the recess, there is provided, on the inner surface of the recess and opposite the passage 127, a number of integrally formed knife-edged projections 134 which are, in this case, substantially parallel and closely positioned next to each other, being spaced apart in the lengthwise direction of extent of the recess 124. The
25 projections 134 are of substantially semi-circular form when viewed in the direction of extent of the recess 124, and extend transversely (for example at 90°) to the direction of extent of the recess 124.

It has been found that the protrusions 134 (or the projections 90 in the arrangement of Figure 5), substantially enhance the performance of the connector 100. This arises particularly where, as is usual, the cable to be connected is in the form of a number of generally axially extending strands. In cases where the interior surface of the
30

recess is plain without projections or the like, there is a tendency for contact pressure with the connector receptacle to become reduced over time due to elastic deformation effects. This is particularly the case where there is insulation or other resilient or structurally weak materials included in the cable which may result in a situation where, at first, a strong clamping action was achieved, but where, under continued pressure from the clamping, these materials eventually partially collapse or become compressed in such a fashion as to permit the clamping force to be reduced, possibly to an unacceptable level. On the other hand, the provision of the knife-edged protrusions 134 described causes the tips of the protrusions, which extend transversely to the cable, to pierce the insulation of the cable and be brought into particularly firm engagement with the cable strands during the clamping action, and it has been found that tendency for relief of clamping forces over time is considerably reduced. Because the protrusions 134 are integral with the receptacle 122, there is no tendency to movement of the protrusions with respect to the receptacle, so that firm gripping is achieved. At the same time, the good electrical interconnection, as between protrusions 134 and contact member 126 and the cable, provided also via the receptacle 122, ensure good electrical connection to the cable.

The recess 124 is as shown in Figure 7 largely circular in cross-section save for the downwardly elongated part opposite to the location of the passage 127, at which the protrusions 134 are located. Figure 10 shows a tool 140 suitable for forming the recess 124 in this shape.

Tool 140 is in the form of an elongate member having a shank 142 and a cutting portion 144 extending therefrom. The cutting portion 144 includes a first shallow cylindrical portion 146 having cutting teeth both on the side edge thereof and at a forward face 147. An intermediate portion 148 of cutting portion 144 extends from portion 146 and has a series of peripheral ridges 150 spaced along the axis thereof these ridges having a profile complementary to the profile of the protrusions 134. Cutting edges 153 are formed on portion 146, by interrupting the ridges 150, by lengthwise extending channels 151 over the portion 148. Finally, the portion 144 has a tip portion 152 of shallow cylindrical form and having channels 156 formed therein to define cutting teeth 154 on the side face and forward end face 155. Portion 152 has a diameter equal

to the maximum diameter of the portion 148, being somewhat less than the diameter of the portion 146.

Figures 8 and 9 show the use of the tool 140 to form the recess 124. In a first
5 step (Figure 8) the tool 140 is advanced axially, while being rotated, to cause portion 144
thereof to cut into the receptacle 122 and form a circular cross-sectioned recess 158.
The cutting teeth on the forward end face 155 act in conjunction with the teeth on the
side of the tip portion 152 to effect this cutting. The so-formed recess 158 has an inner
portion which is formed in this fashion and an outer portion which is formed by the teeth
10 on the side and forward surfaces of the portion 146. The depth of the outer portion is
equal to the depth of the recess section 130 of the final recess 124 and the depth of the
inner portion corresponds to the depth of the recess section 132 of the final recess 124.

Following the step in Figure 9, while continuing to rotate the tool 140, the tool
15 is moved sidewardly (downwardly as viewed in Figure 9). Under this action, the portion
144 continues to cut material from the receptacle 122, both along the inner end of the
recess 158 and at the side thereof. At this time too, the cutting teeth 153 formed on the
portion 148 cut into the side surface of the recess 158 to form the protrusions 134.
Similarly, the sideways movement of the portion 146 serves to cut into the side of the
20 recess 158 at the location of the larger diameter portion of the recess 158. By this
fashion, the recess 158 is sidewardly elongated in cross-section to produce the final
recess 124, with the protrusions 134 formed and positioned as shown.

Subsequent to the formation of the recess 124, the passage 127 is formed and
25 screw threaded to accommodate the contact member 126.

The connector 100 may be used in the same fashion as those previously described
and, in particular, the contact member may be formed with an inner end portion as
previously described, formed with cutting edges and profiled as described. It has been
30 found however that it is possible to simply form the inner end of the contact members
useful in the invention in the configuration shown in Figure 11, where the end portion
160 of the connector member is formed as a domed formation which is smooth, being

free of cutting edges. The formation may for example be semi-spherical, and may include one or more cavities like the cavity 36 previously described, and filled with jointing compound.

- 5 The foregoing detailed description of features of the invention has been put forward by way of example only, and is not intended to be limiting to the invention, which is defined in the appended claims.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

1. An electrical connector for making electrical connection to an electrical conductor sheathed by an insulative covering, comprising:
 - 5 a conductor receptacle having a recess therein for receiving an insulated portion of an electrical conductor; and
 - electrical contact means supported by the receptacle and moveable transversely thereto the conductor when received in the recess, the contact means having an end portion adapted to displace or pierce an insulative covering of said portion of the
 - 10 insulated conductor and make electrical connection to said conductor upon such transverse movement, said recess having knife edged protrusions to facilitate the insulation piercing and electrical connection on a side of the electrical conductor opposite to the contact means, said conductor receptacle being electrically conductive and said knife edged protrusions being formed integrally with the receptacle, the electrical contact
 - 15 means being electrically connected to the receptacle.
2. An electrical connector as claimed in claim 1 wherein the conductor receptacle comprises a housing having a generally cylindrical or contoured hole or passage therein which constitutes said recess.
- 20 3. An electrical connector as claimed in claim 2 wherein the electrical contact means extends through a wall of the housing from the outside thereof such that the end portion, in use, protrudes into the recess.
- 25 4. An electrical connector as claimed in claim 3 wherein the recess is dimensioned in cross-section to allow an insulated conductor portion to be inserted therein with only a small clearance between the exterior of the insulative layer and the interior surface of the recess itself.
- 30 5. An electrical connector as claimed in any preceding claim wherein the contact means is provided with an external screw thread for engaging an internally threaded passage in the conductor receptacle, wherein rotation of the contact means effects relative

movement as between the contact means and receptacle so as to cause the contact means end portion to protrude into the recess to make said electrical connection with an insulated conductor when inserted therein.

5 6. An electrical connector as claimed in claim 5 wherein the screw threaded contact means engages a spring loaded block which is spring biased towards the recess to help maintain electrical contact subsequent to insulation piercing.

7. An electrical connector as claimed in any one of claims 1 to 4 wherein the contact
10 means is arranged to undergo movement relative to the receptacle under action driving means and held in its electrically connecting orientation by way of a spring bias or the elasticity of the device as a whole.

8. An electrical connector according to any preceding claim wherein the end portion
15 of the contact means is provided with an insulation cutting surface to aid the end portion in piercing or displacing the insulative layer.

9. An electrical connector according to any one of claims 1 to 8 wherein the end
20 portion of the contact means is domed and smooth.

10. An electrical connector according to any one of claims 1 to 4 wherein the contact means is in the form of a screw threaded bolt or the like, having a generally rounded end with a radially and axially extending cutting edge.

25 11. An electrical connector according to any preceding claim wherein a jointing compound is provided on the end portion of the contact means.

12. An electrical connector according to any preceding claim wherein the contact means end portion has one or more cavities which are filled with jointing compound.
30

13. An electrical connector according to any one of claims 9 to 12 wherein a jointing compound receiving cavity filled with jointing compound is provided where the contact means engages the conductor receptacle to facilitate reliable electrical contact.

5 14. An electrical connector according to claim 13 wherein the outer edge of the jointing compound receiving cavity serves also as a cutting edge.

15. An electrical connector according to any preceding claim having a plurality of angularly displaced contact means disposed about the recess.

10

16. An electrical connector as claimed in any preceding claim wherein said knife-edged projections are concavely part-circular when viewed in the lengthwise direction of extent of the recess.

15 17. An electrical connector as claimed in claim 16 wherein said knife-edged projections are substantially semi-circular when viewed in the lengthwise direction of extent of the recess.

18. An electrical connector as claimed in claim 16 or 17 wherein said recess has the
20 cross-sectional form of two opposed semi-circular portions, interconnected by straight line portions, with said knife-edged projections disposed at one of said semi-circular portions, and the electrical contact means arranged at the other of the semi-circular portions.

25 19. A method making a conductor receptacle for an electrical connector for making electrical connection to an electrical conductor sheathed by an insulative covering, the electrical connector comprising:

said conductor receptacle having a recess therein for receiving an insulated portion of an electrical conductor; and

30 electrical contact means supported by the receptacle and moveable transversely thereto the conductor when received in the recess, the contact means having an end portion adapted to displace or pierce an insulative covering of said portion of the

insulated conductor and make electrical connection to said conductor upon such transverse movement, said recess having knife edged protrusions to facilitate the insulation piercing on a side of the electrical conductor opposite to the contact means,

5 said method including forming said recess by use of a cutting tool having a forward portion provided with end and side cutting teeth and a following portion formed with teeth of profile complementary to the form of the protrusions, comprising advancing the tool into a block of material which is to form the conductor receptacle so that the teeth on the forward portion cut a circular recess, and then moving the tool sidewardly within the circular recess to sidewardly elongate the circular recess and cause the teeth
10 on the following portion to form said protrusions as part-circular ridges.

20. A method for making electrical connection to an insulated electrical conductor, comprising the steps of providing an electrically conductive receptacle having a recess for receiving an insulated portion of an electrical conductor, said recess having
15 transversely extending knife-edged protrusions formed integrally, providing a contact means which is electrically coupled to the conductor receptacle and moveable relative to the receptacle to enable an end portion thereof to protrude into said recess at a side opposite said protrusions, inserting an insulated portion of an electrical conductor in said recess, and displacing the contact means with respect to the receptacle so as to penetrate
20 an insulative layer of the insulated conductor portion and make electrical contact with the electrical conductor underneath, and to cause said knife-edged projections to also pierce the insulative layer to make contact with the electrical conductor.

21. An electrical connector for making electrical connection to an electrical conductor sheathed by an insulative covering, comprising:
25

 a conductor receptacle having a recess therein for receiving an insulated portion of an electrical conductor; and

 electrical contact means supported by the receptacle and moveable transversely thereto the conductor when received in the recess, the contact means having an end
30 portion adapted to displace or pierce an insulative covering of said portion of the insulated conductor and make electrical connection to said conductor upon such

transverse movement, said end portion or said electrical contact means being of domed form substantially free of cutting edges.

22. An electrical connector as claimed in claim 21 wherein said end portion is
5 provided with a jointing compound receiving cavity, having jointing compound therein.

23. An electrical connector substantially as hereinbefore described with reference to Figures 2 to 11 of the accompanying drawings.

10 24. A method of making an electrical connector substantially as hereinbefore described with reference to Figures 2 to 11 of the accompanying drawings.

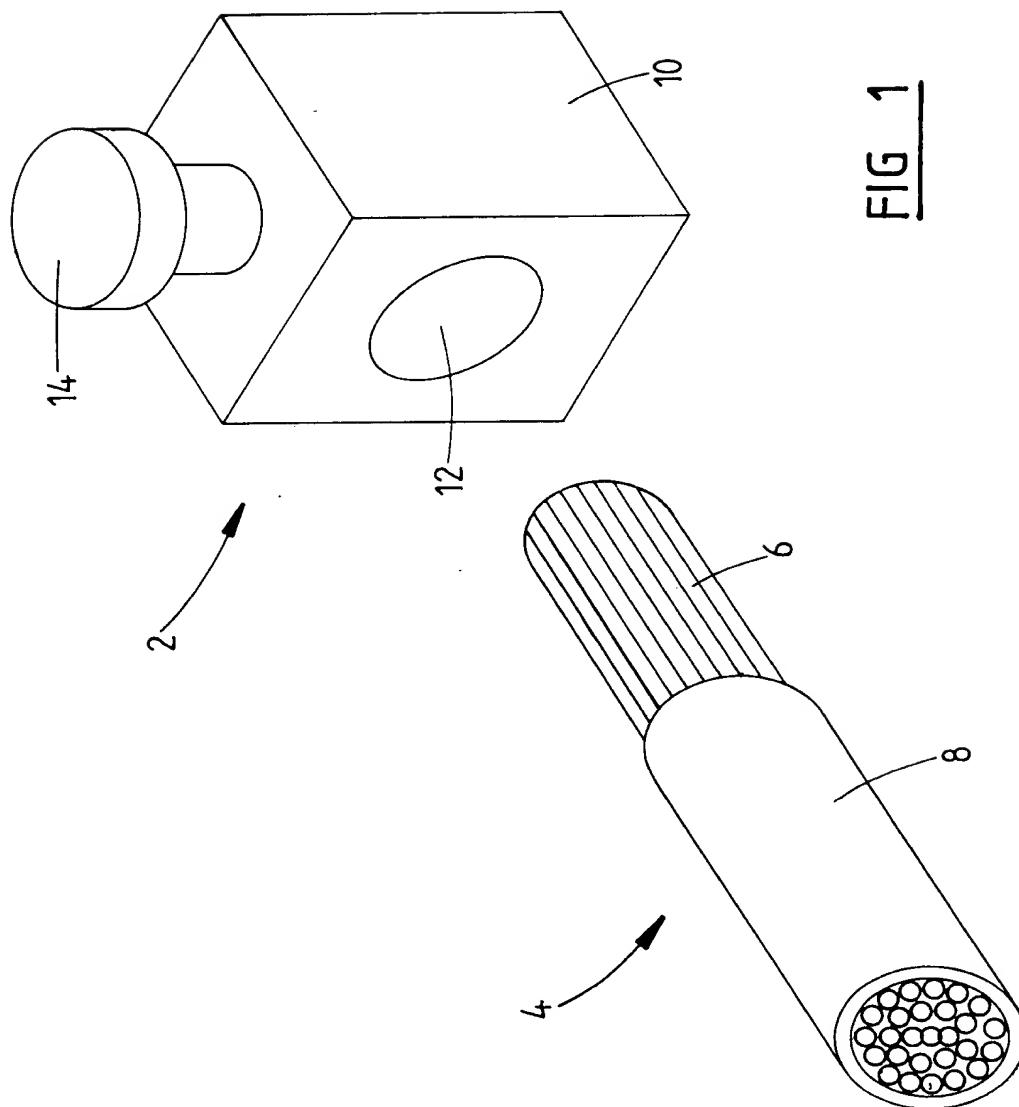
25. A method of making a conductor receptacle of an electrical connector substantially as hereinbefore described with reference to Figures 2 to 11 of the accompanying
15 drawings.

20 DATED this twenty third day of August, 1995.

KRONE AKTIENGESELLSCHAFT

by DAVIES COLLISON CAVE

Patent Attorneys for the Applicant



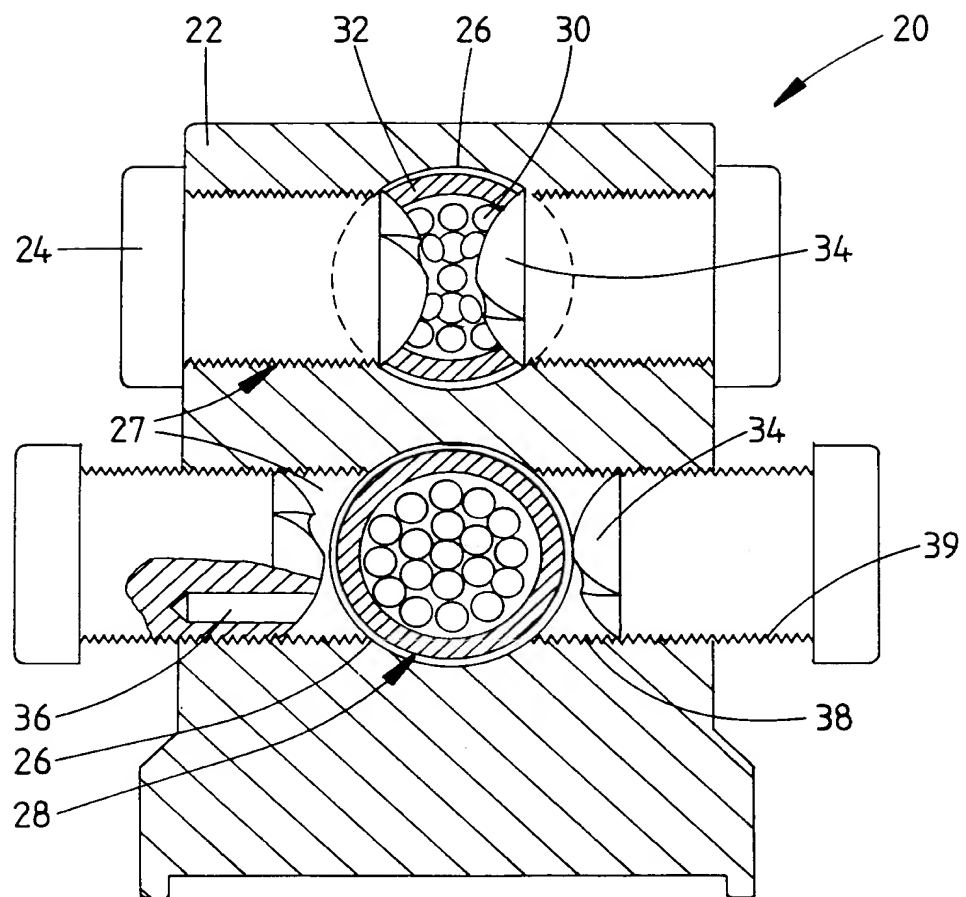
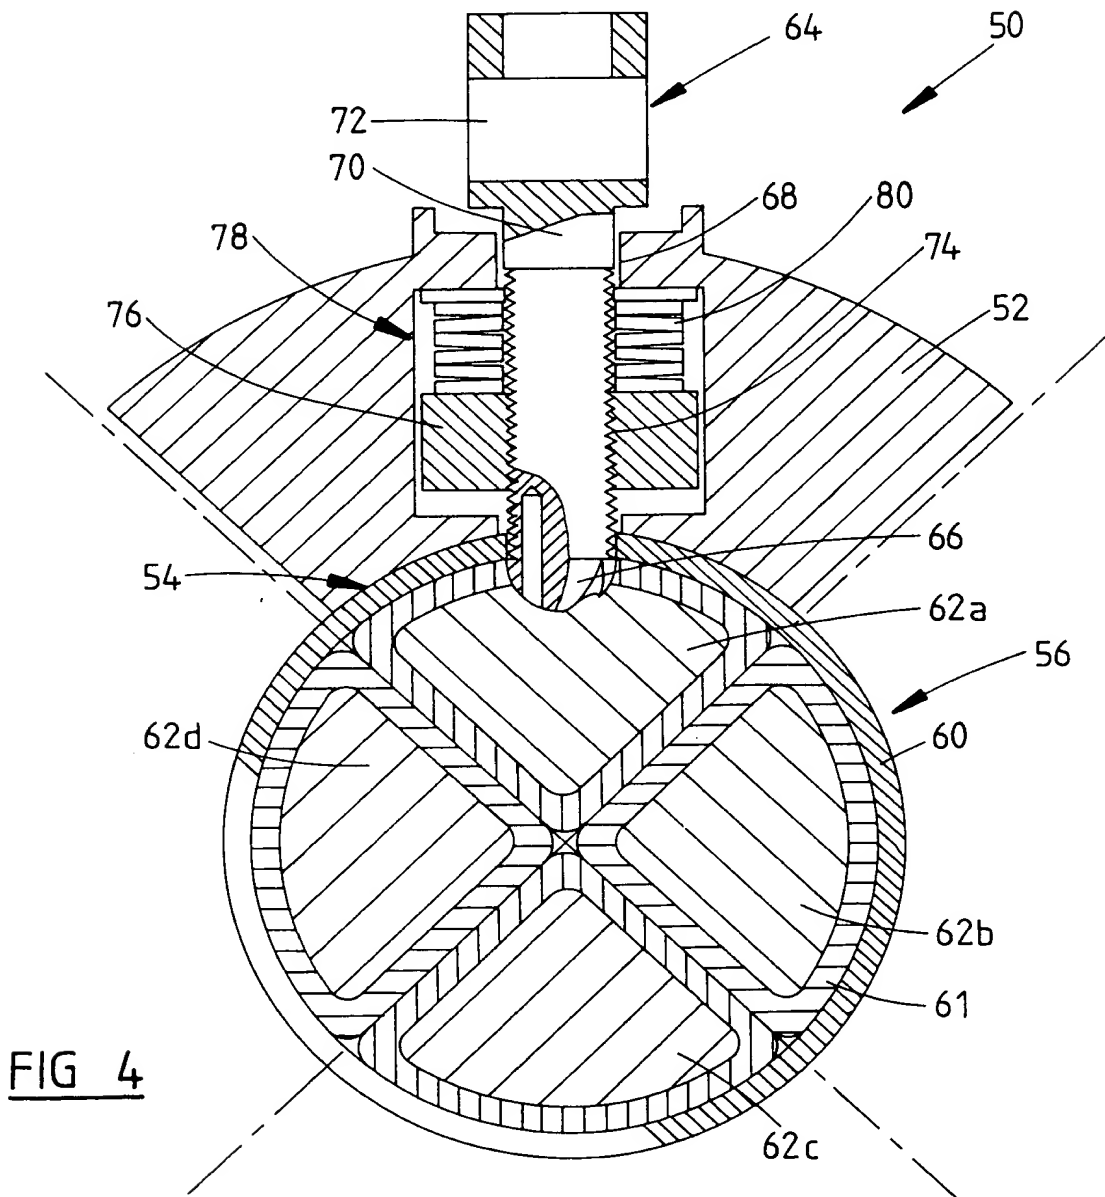
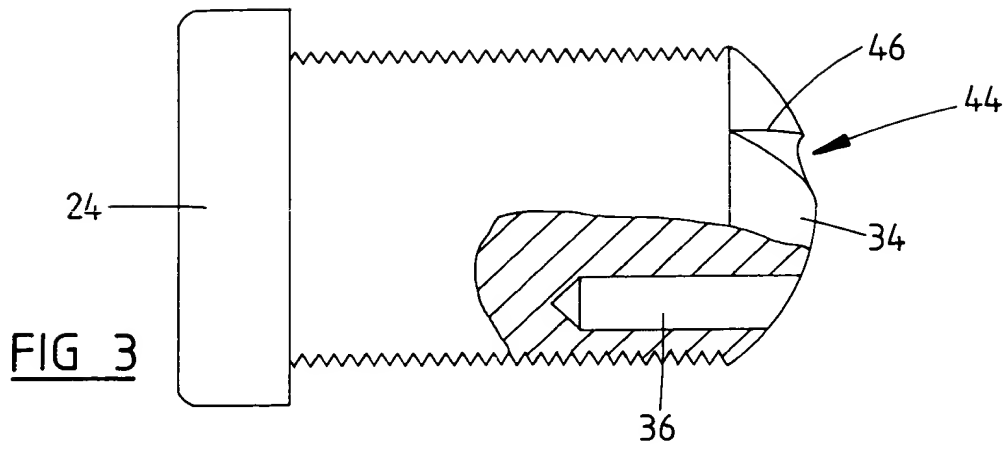


FIG 2



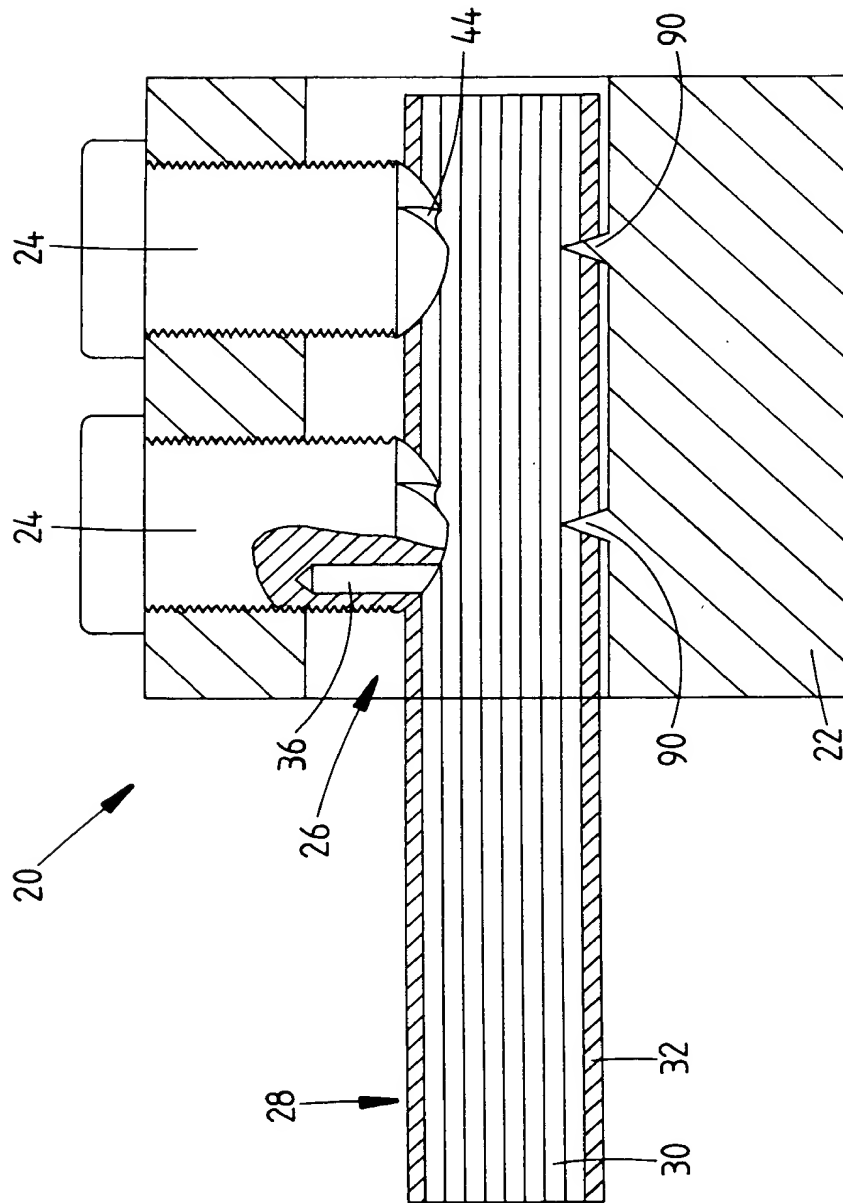


FIG 5

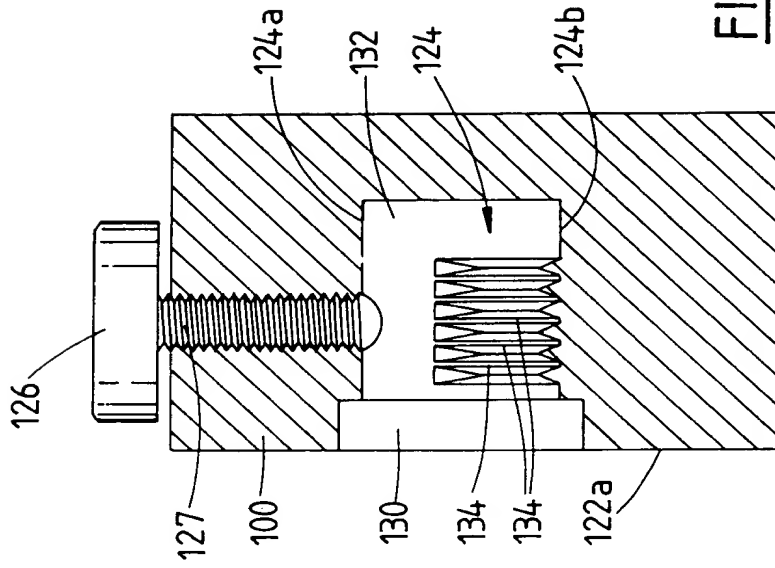
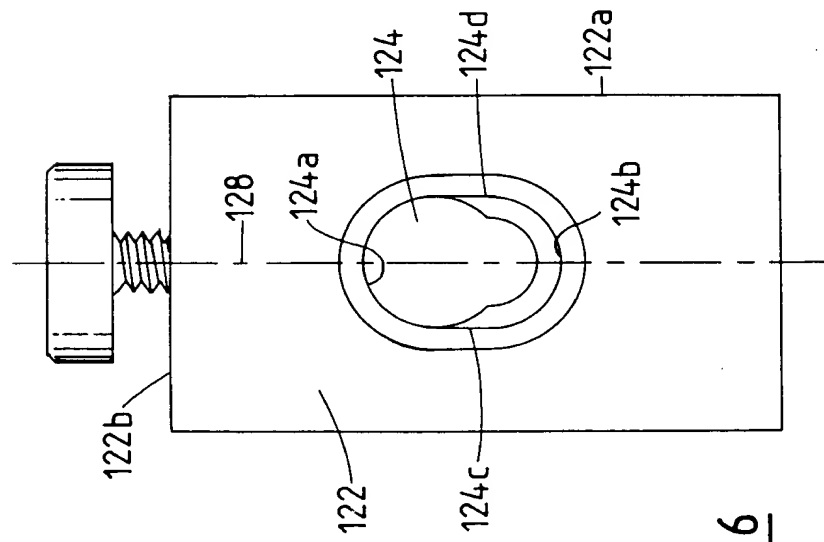


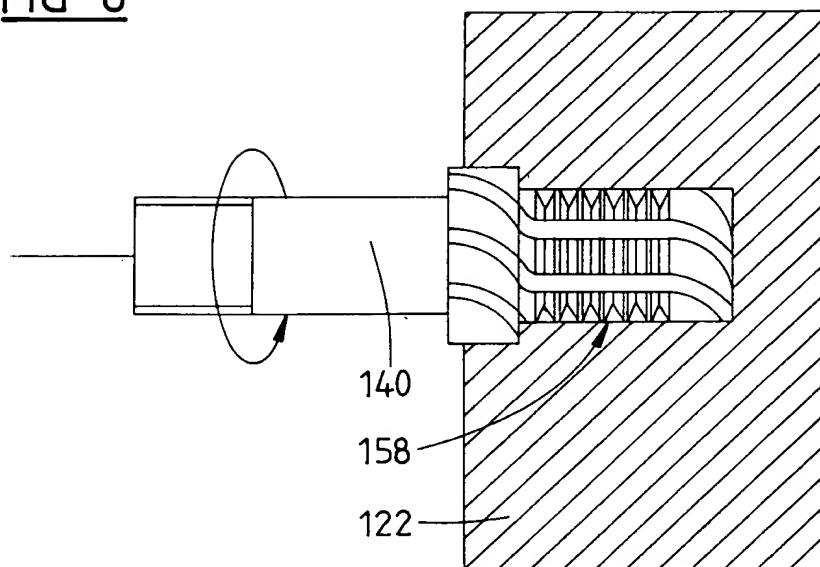
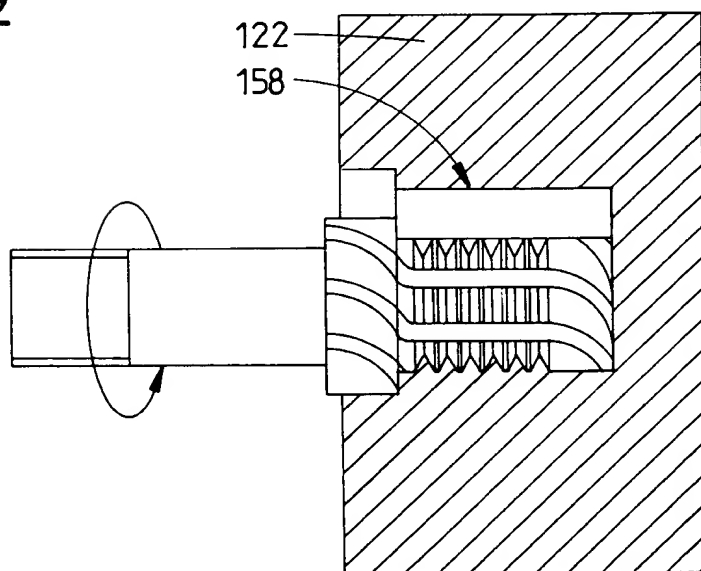

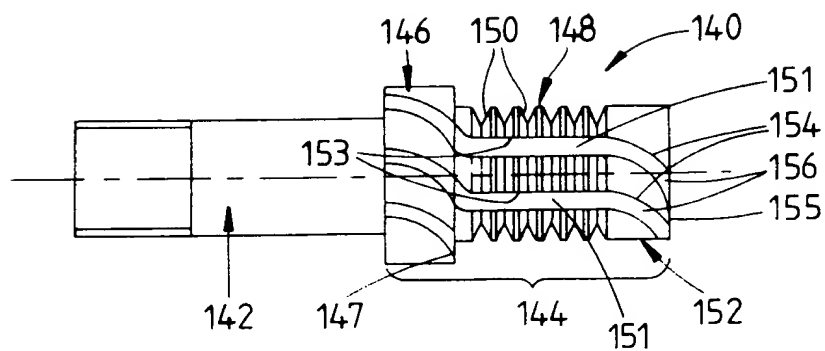
FIG 8FIG 9

FIG 10FIG 11